

Niple Macho


CLAVE	MODELO	DIMENSIONES	MATERIAL	PZS/BOLSA
1885	JT1/4X1/4	R ₁ ¼ x R ₁ ¼	Fierro	10
1886	NB 1/4 x 1/2	1/4 Flare x 1/2 NPT	Fierro	10
1887	JT3/8X3/8	R ₁ ¾ x R ₁ ¾	Fierro	10
1835	ZJT-CY1	R ₁ x G ¾"	Aleación de Zinc	10
1836	ZJT-CY2	R ₁ ¾ x ¾-16UNF	Fierro	5



Niple Rápido Macho

CLAVE	MODELO	MATERIAL	ESTILO	ALTURA	CONEXIÓN	PZS/BOLSA
8851	GC01	Bronce	Americano	39 mm	Macho ¼"	10
8852	GC02	Bronce	Europeo	35.5 mm	Macho ¼"	10
8853	GC03	Bronce	Japonés	35.5 mm	Macho ¼"	10
8854	GC04	Fierro	Americano	36 mm	Hembra ¼"	10
8855	GC05	Fierro	Americano	44 mm	Manguera 8 mm	10
8856	GC06	Fierro	Americano	25 mm	Manguera 8 mm	10

*Presión de trabajo máxima: 210 PSI.

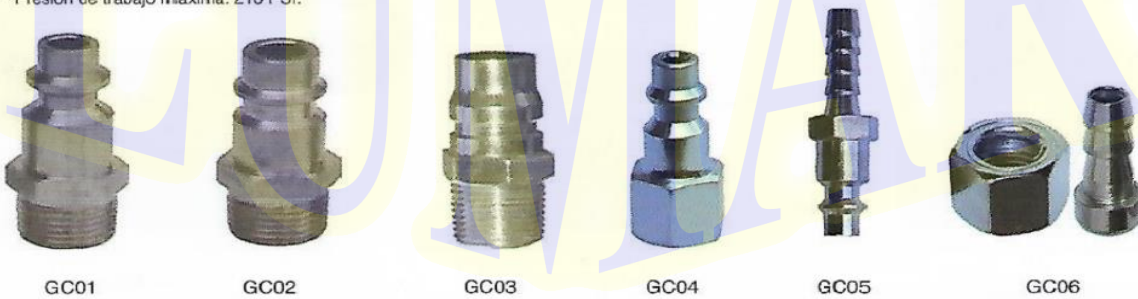

NIPLE ROSCADO A CONECTOR DE EMPUJE

CLAVE	MODELO	FORMA	CONEXIÓN	ROSCA	MATERIAL	DIMENSIONES (mm)		PESO
						H	D1	
5804	YF-4060A-E8MM	MACHO	1/4NPT X 8MM	NPT	BRONCE	27	17	5g
5805	YF-4060B-18MM	HEMBRA	1/4NPT X 8MM	NPT	BRONCE	21	14	10g

